


DN 50–400 Standard construction

- Valve operated by handwheel
- Material acc. to data sheet 2.0.13
- Coating acc. to data sheet 2.0.12
- Flange drilling: DN 50-150 PN16
DN 200-400 PN10
EN 1092 / ISO 7005
- Face-to-face: EN 558 Series 20
ISO 5752 Series 20
(K1 DIN 3202)
- Nominal pressure: DN 50-300 10 bar
DN 350-400 6 bar
- Test pressure acc. to EN 12266-1
Leakage rate C

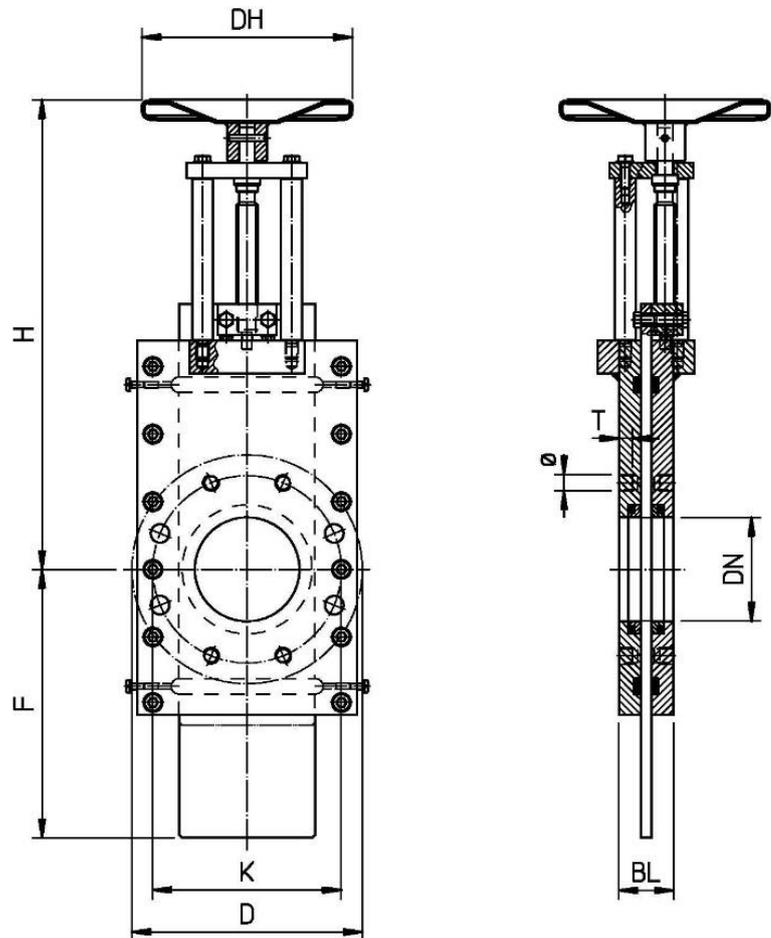

DN	D	K	BL	H	F	DH	Ø	T	Screws	⊕	⊕	BD max.	Weight
50	165	125	43	308	141	150	M16	17	4 pcs.	4	-	10	13 kg
65 ¹	185	145	46	344	174	150	M16	12	8 pcs.	2	6	10	19 kg
80	200	160	46	379	207	200	M16	12	8 pcs.	4	4	10	23 kg
100	220	180	52	451	258	200	M16	15	8 pcs.	4	4	10	35 kg
125	250	210	56	514	298	200	M16	17	8 pcs.	4	4	10	44 kg
150	285	240	56	613	348	300	M20	14	8 pcs.	4	4	10	61 kg
200	340	295	60	738	418	300	M20	18	8 pcs.	4	4	10	106 kg
250	395	350	68	870	500	300	M20	17	12 pcs.	8	4	10	132 kg
300	445	400	78	1014	575	400	M20	21	12 pcs.	8	4	10	199 kg
350	505	460	78	1158	715	400	M20	21	16 pcs.	12	4	6	279 kg
400	565	515	102	1283	795	400	M24	24	16 pcs.	12	4	6	447 kg

¹ DN 65 with 8 holes

⊕ Tapped holes

⊕ Through bore