



DN 200–1000 Standardconstruction

- Valve operated by electric actuator AUMA type SA... 3x400 V/50 Hz
- Option: AUMA-MATIC rising stem
- Material: on request
- Coating: on request
- Flange drilling: see table
- Face-to-face: see table
- Pressure rating: 2.5 bar
- Test pressure acc. to EN 12266-1 Leakage A

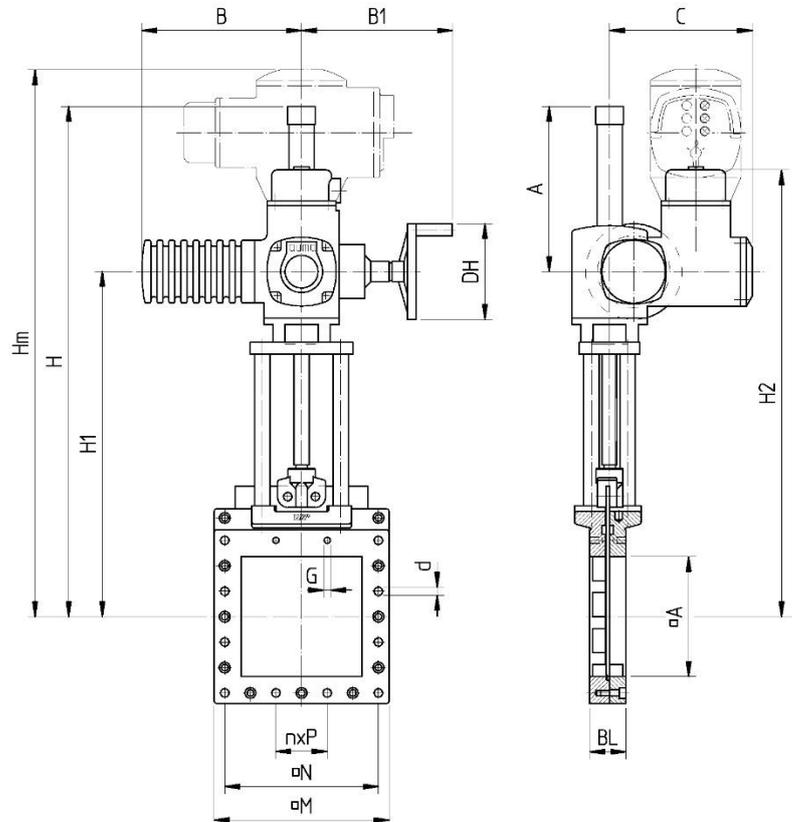

Flanschbilder



A	BL	H	H1	H2	Hm	DH	A	B	B1	C	Actuator SA	G	d	M	N	n x P	Flange picture
200	60	811	629	839	969	160	182	265	249	238	07.6	M12	14	290	255	3 x 85	1
250	70	940	750	960	1090	200	190	283	254	248	10.2	M16	18	390	330	3 x 110	1
300	70	1125	835	1045	1175	200	290	283	254	248	10.2	M16	18	440	380	4 x 95	2
350	80	1330	940	1150	1280	200	390	283	254	248	10.2	M16	18	490	416	4 x 104	2
400	90	1405	1015	1225	1355	200	390	283	254	248	10.2	M20	22	540	480	4 x 96+	3
450	100	1531	1125	1351	1533	315	406	389	336	286	14.2	M20	22	595	550	5 x 110	1
500	110	1710	1204	1430	1612	315	506	389	336	286	14.2	M20	22	650	600	6 x 100	2
600 ¹	130	1962	1356	1582	1764	315	606	389	336	286	14.2	M20	22	760	700	7 x 100	1
700 ¹	150	2271	1565	1791	1973	315	706	389	336	286	14.2	M20	22	860	800	8 x 100	2
800 ¹	160	2531	1725	1951	2133	400	806	389	339	286	14.6	M20	22	980	900	9 x 100	1
900 ¹	180	2831	1925	2151	2333	400	906	389	339	286	14.6	M20	22	1080	1000	10 x 100	2
1000 ¹	200	3135	2110	2340	2522	500	1025	430	365	303	16.2	M20	22	1180	1100	11 x 100	1

¹ DN 600-1000 actuator 90° turned